



TUNDRA 30 TONNE HIGH CAPACITY HOLLOW PLUNGER HYDRAULIC CYLINDER


TUNHYDCY30-150HW

- This hollow plunger design allows for both push & pull forces
- Single-acting, with hydraulic advance and spring return
- Manufactured from high-strength, durable alloy steel
- Anti-corrosive baked enamel finish
- With R2 3/8" Male quick connector and protective dust cap
- Stroke: 150mm
- Effective area: 47.7cm²
- Oil capacity: 715cm³
- Closed Height: 312mm
- Extended Height: 462mm
- Outside Diameter: 114mm
- Inside Diameter: 90mm
- Piston rod Diameter: 63mm
- Piston Rod Bore: 33mm
- Hose connection: 3/8"
- Weight: 20kg

COMPATIBLE WITH
TUNHNDPMP-700A
& TUNHNDPMP-A
HYDRAULIC HAND PUMPS



3/8" MALE
QUICK
CONNECTOR

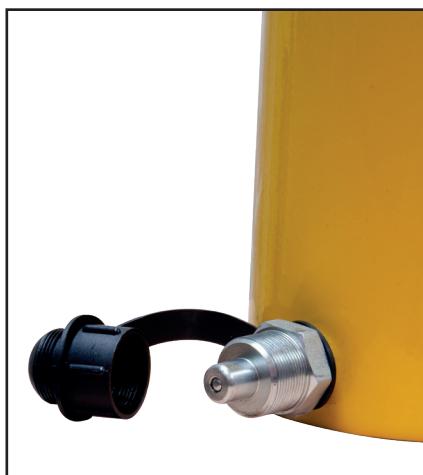

30

TONNE

INDUSTRIAL

Jefferson[®]
PROFESSIONAL TOOLS & EQUIPMENT

www.jeffersonstools.com



UK: +44(0) 1244 646 048 | ROI: +353(0) 1473 0300